


FT Series


FT Series

The fanfree system is designed for application in quiet environments. Housed with stylish aluminum main unit casing which will add a fashionable spotlight to your counter while providing effective ventilation for quiet operation.

- ❑ Compact All-in-one M/B design with Rich I/O especially for POS Terminal
- ❑ Low power consumption and fanfree design for quiet operation
- ❑ Intel Mobile High Performance Platform
- ❑ Good Flexibility Design suitable for various applications
- ❑ Available with different Touch Panel Technology (5-wire resistive, SAW, Capacitive)
- ❑ Extremely Solid and Reliable structure
- ❑ Water spill resist from the front bezel side
- ❑ Power Switch and LCD Brightness Control Panel on the Side
- ❑ Hidden Connector and Power Cable Design
- ❑ Optional Wi-Fi Wireless LAN for data transmission
- ❑ Optional CF Socket functionality for thin client application
- ❑ Removable HDD Design for easy maintenance

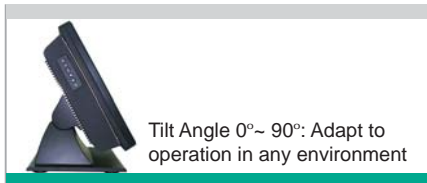

Tilt Angle 0°~ 90°: Adapt to operation in any environment

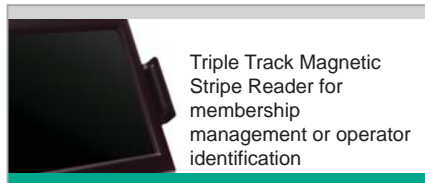

Triple Track Magnetic Stripe Reader for membership management or operator identification



Removable Base and Wall Mounting capability with 75mm VSEA holes



Second Display can be integrated to the back side of the system.



Customer Display VFD type (2X20)
VFD Customer Display can be integrated to the back side of the system



Easily arrange the cables inside the stand.

FT Series

The Best Fanless Touch Solution



FT-150/FT-170

Specification	MODEL	FT-150	FT-170
Motherboard	CPU	Intel Celeron Mobile 2.0GHz (Optional: Intel Core 2 Duo Mobile)	
	System Freq.	533MHz (800MHz for C2D)	
	Chipset	Intel 960GLE + ICH8M	
	Memory	2 x 200PIN DDR2 DIMM up to 2GB (2 x 200-PIN DDR2 DIMM up to 4GB)	
	Video	Intel 960GLE 3D Graphic Engine	
	Ethernet	10/100/1000Mbps	
	Audio	AC97 Audio Codec	
Storage Device	2.5" SATA HDD x 1 Compact Flash II Socket x 1		
I/O Connector	Serial Port x 4 Parallel Port x 1 USB 2.0 Port x 4 PS/2 Mini-DIN Keyboard Port x 1 & Mouse Port x 1 VGA Port x 1 (for second screen) RJ-45 Ethernet Port x 1 RJ-12 Cash Drawer Port x 2 Audio Line-out Port x 1 & Mic-in Port x 1		
Expansion Slot	Mini PCI Slot x 1		
Monitor	15" XGA TFT LCD	17" SXGA TFT LCD	
Touch Screen	TW 5-wire or ELO Resistive Touch Screen (RS-232 or USB Interface)		
Power Supply	External Power Supply		
Dimension (mm)	380(W) x 255(D)x 312(H)	418(W) x 254(D)x 328(H)	
Optical Integrated Device	VFD Customer Display, MSR Card Reader, Fingerprint Scanner, 3-in-1 Hybrid Card Reader, Second 12"/15"/17" LCD Screen with or without Touch Screen		